

MSD IGNITION INSTALLATION INSTRUCTIONS

Retard Degree Module Selector Switch

PN 8676 0° - 11°

PN 8678 0°/10° - 20°

Parts Included:

- 1 – Retard Degree Module Selector Switch
- 4 – Mounting Screws

Mount the Switch close to the MSD Ignition in a position so it is accessible and easy to read. **The wires of the Switch cannot be lengthened.** Use the supplied mounting screws or the adhesive on the back panel of the unit to mount the Switch.

The 2-pin connector of the Switch plugs into the retard degree module receptacle of the MSD component. There is no polarity so its position does not make a difference.

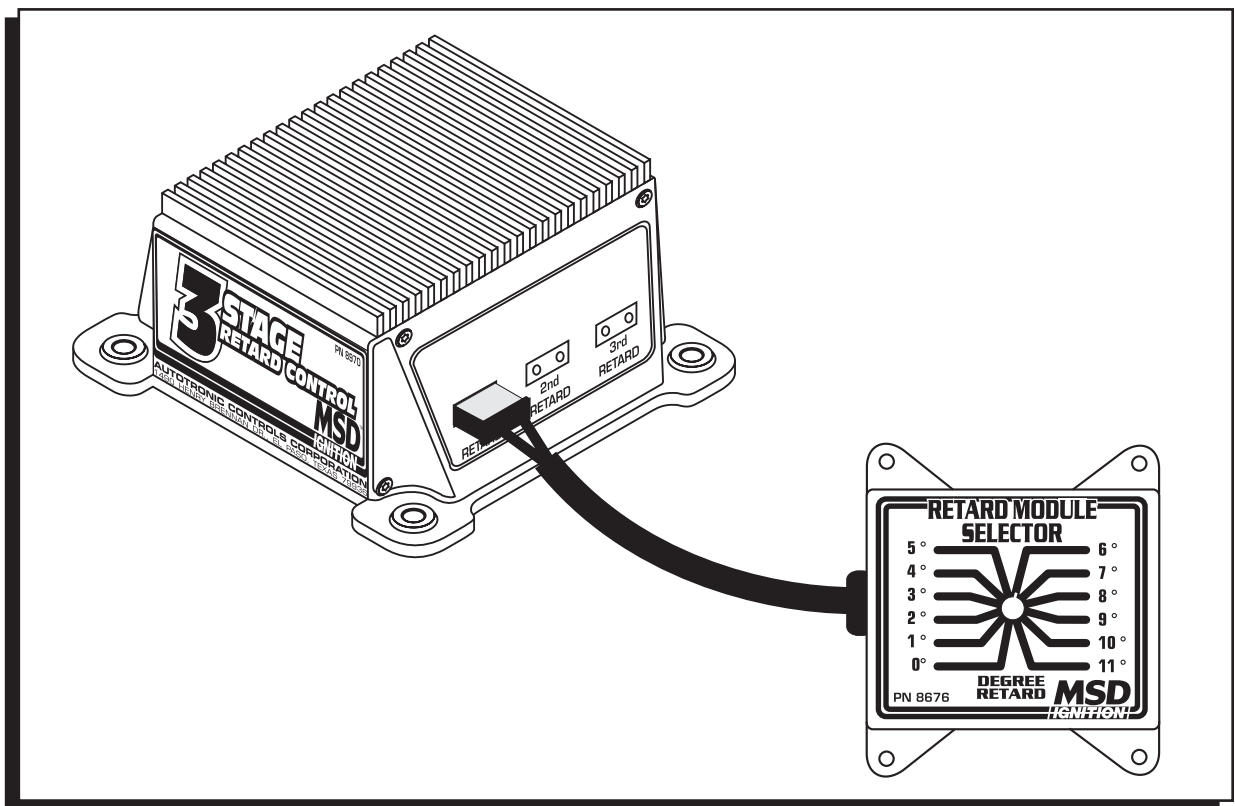


Figure 1 Retard Degree Module Selector Installation.

